

AERODROME CHART


ATIS 127.85
TWR 118.35(123.65)
GND 121.6

ZBSJ SHIJIAZHANG/Zhengding

N38°16.9'E114°41.9' ELEV 71m



BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

RWY	Direction	Bearing strength(PCN)
15	152°	RWY, Stands Nr.101-116,159-165 PCN:63/R/B/W/T
		TWYs A3, A4, B7, B8, C PCN:66/R/B/W/T
		TWYs A, A1, A2, A5, A6, B9 Stands Nr.151-158 PCN:68/R/B/W/T
33	332°	TWYs B, B1-B6, H, H1, J, J1, K, K1, K2 Stands Nr.201-227, 217L, 217R PCN:68/R/B/W/T 501-511, 506L, 506R

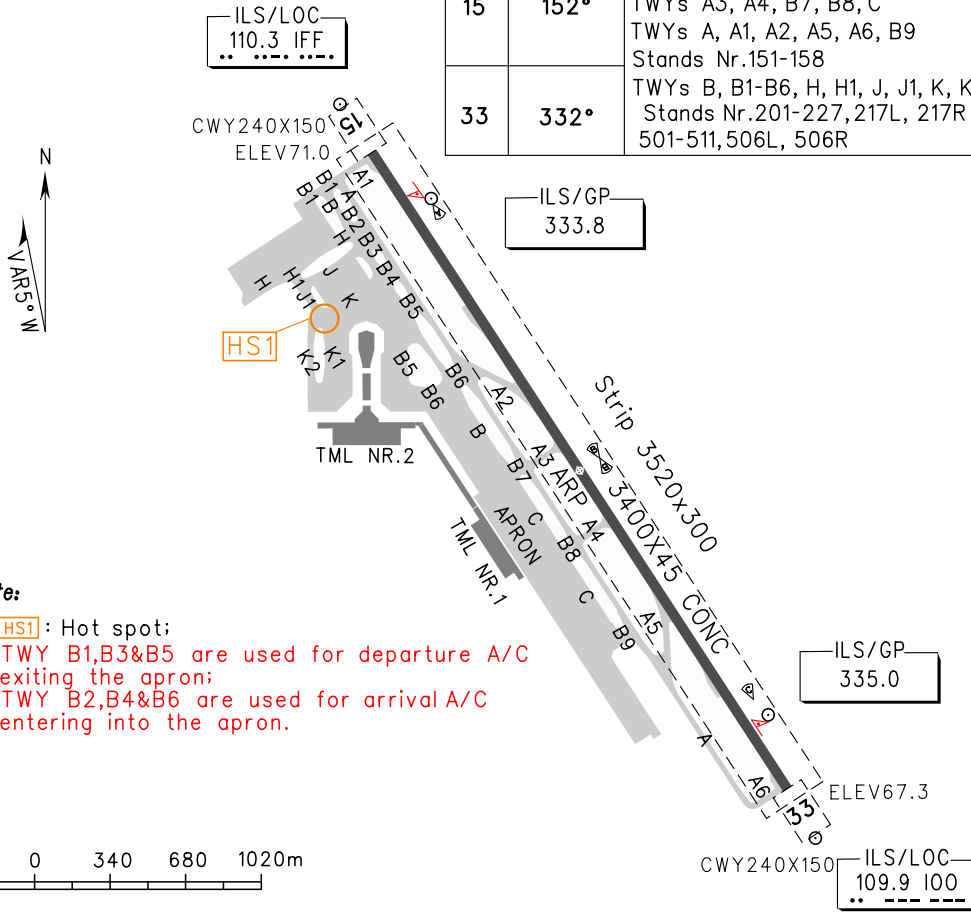

Note:

- HS1: Hot spot;
- TWY B1,B3&B5 are used for departure A/C exiting the apron;
- TWY B2,B4&B6 are used for arrival A/C entering into the apron.

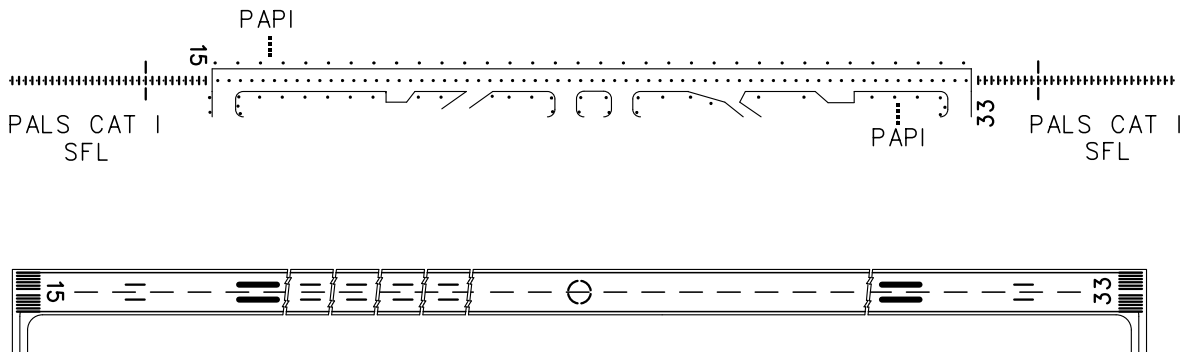

	TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS	
	RWY15		RWY33		RWY15	RWY33
	REDL	NIL(Day only)	REDL	NIL(Day only)		
A					PALS CAT I SFL	PALS CAT I SFL
B	RVR 400	RVR 500	RVR 400	RVR 500	PAPI	PAPI
C	VIS 800	VIS 800	VIS 800	VIS 800	REDL	REDL
D					RCLL	RCLL

Changes: WDI.